



5. Object - ConfigMap, Secret


Dev

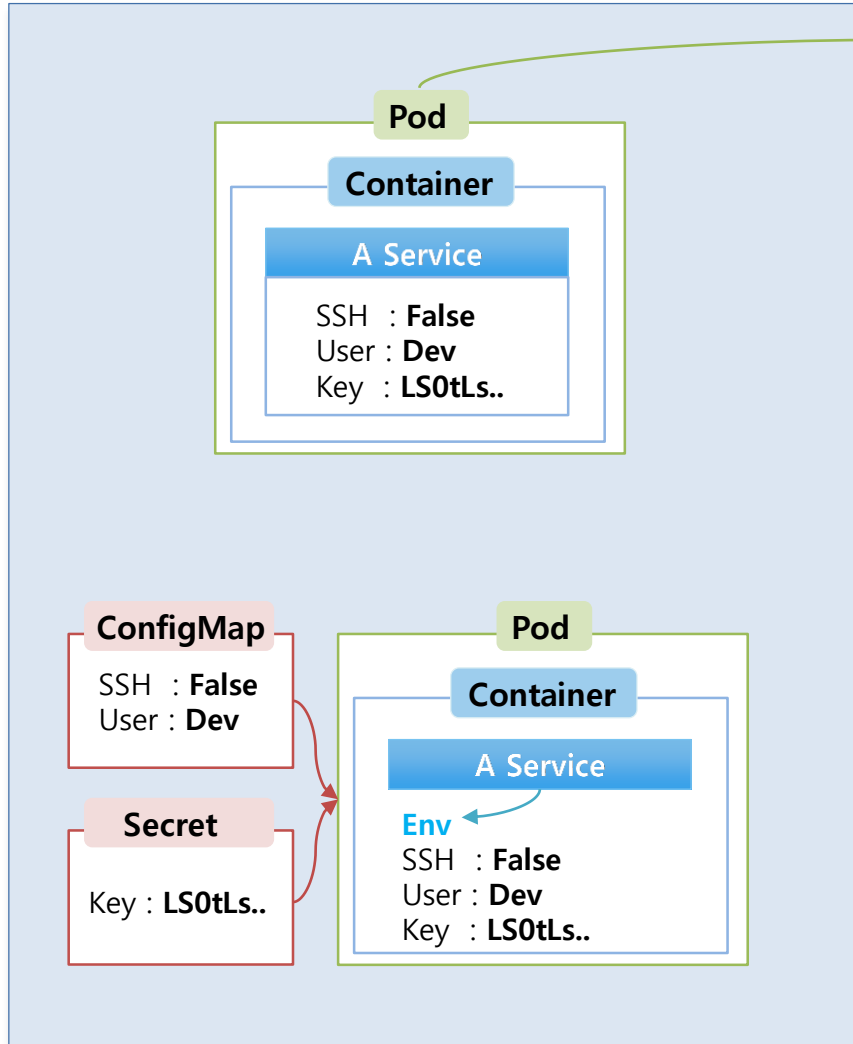




Production

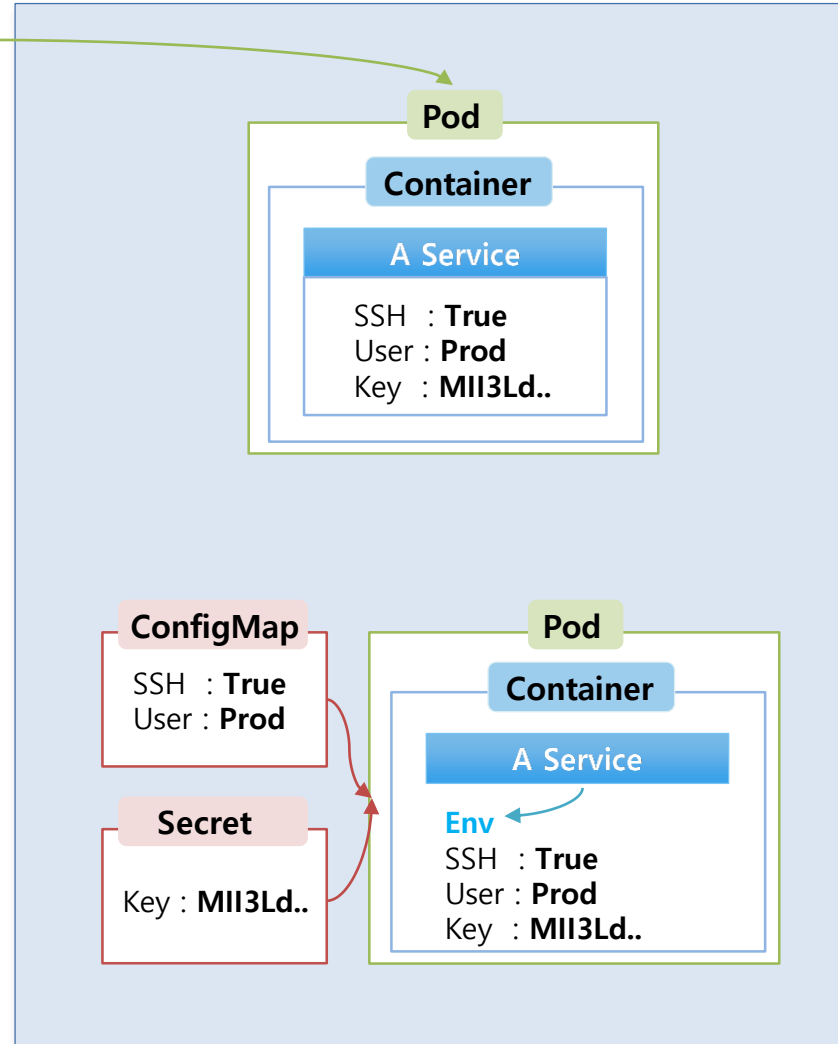

Image

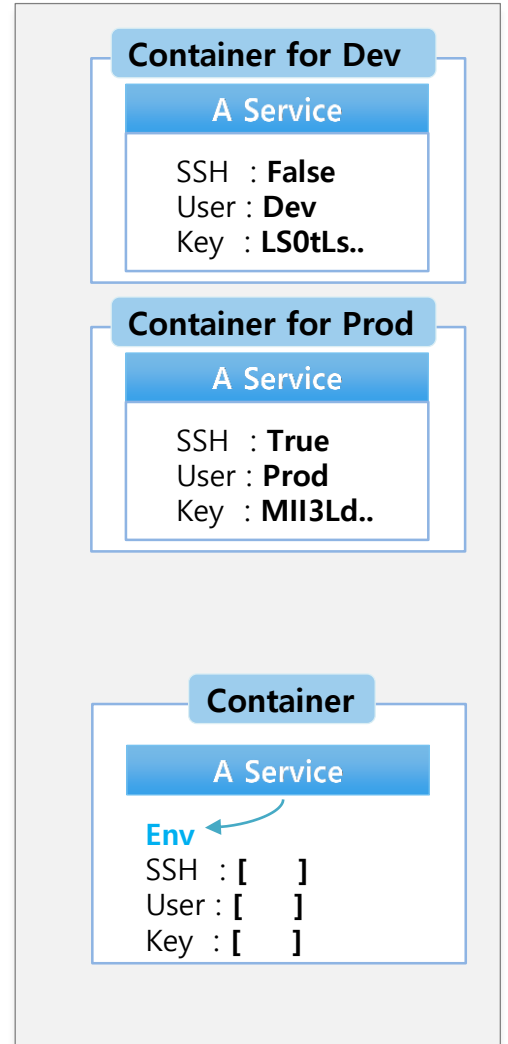

5. Object - ConfigMap, Secret

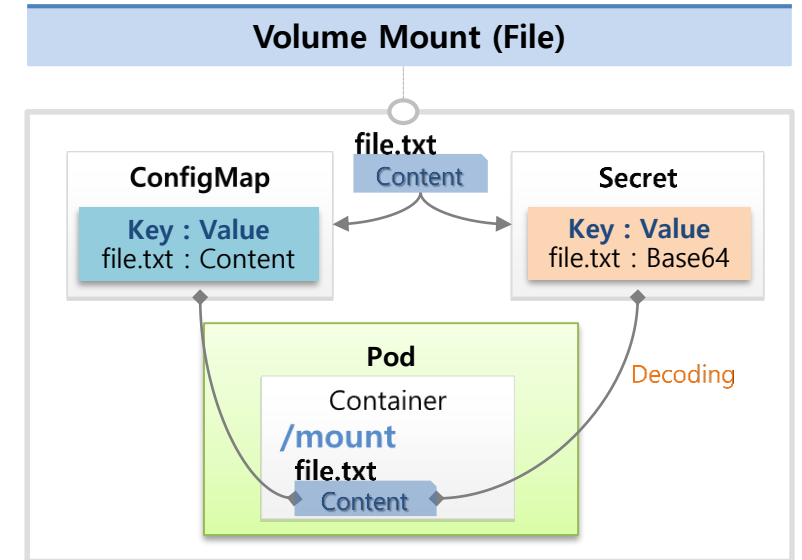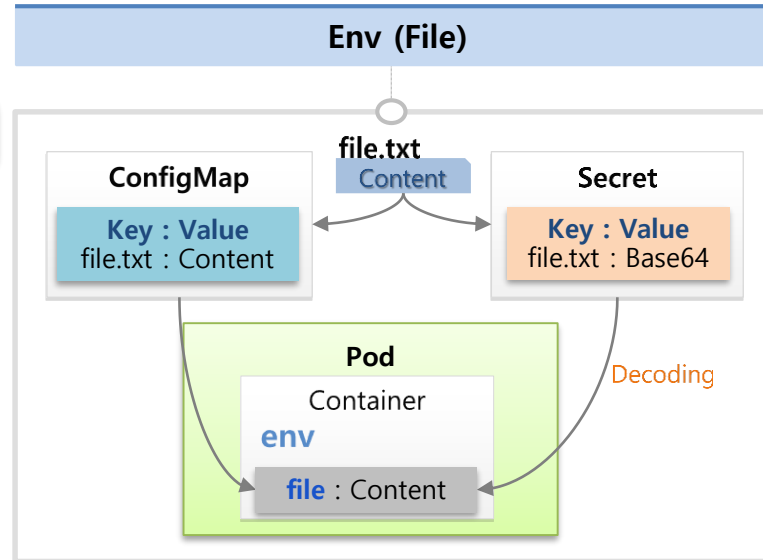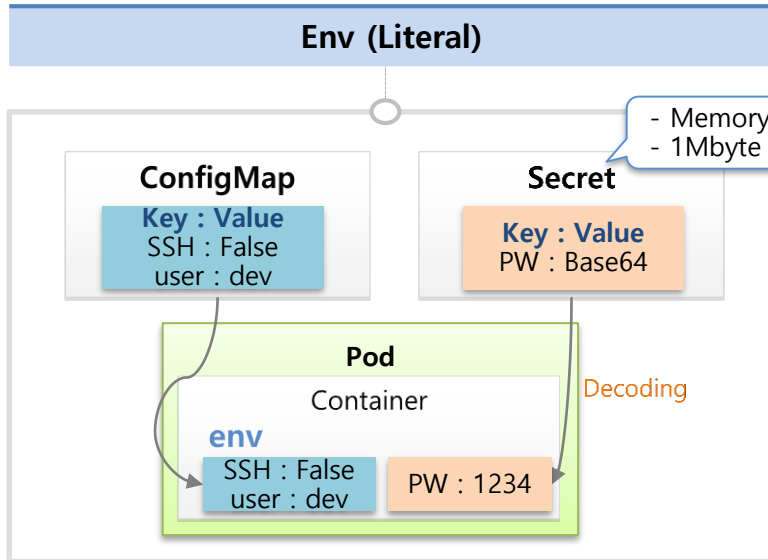

```
apiVersion: v1
kind: ConfigMap
metadata:
  name: cm-dev
data:
  SSH: False
  User: dev
```

```
apiVersion: v1
kind: Pod
metadata:
  name: pod-1
spec:
  containers:
    - name: container
      image: tmkube/init
      envFrom:
        - configMapRef:
            name: cm-dev
        - secretRef:
            name: sec-dev
```

```
apiVersion: v1
kind: Secret
metadata:
  name: sec-dev
data:
  Key: MTIzNA==
```

```
kubectl create configmap cm-file
--from-file=./file.txt
```

```
kubectl create secret generic sec-file
--from-file=./file.txt
```

```
apiVersion: v1
kind: Pod
metadata:
  name: file
spec:
  containers:
    - name: container
      image: tmkube/init
      env:
        - name: file
          valueFrom:
            configMapKeyRef:
              name: cm-file
              key: file.txt
```

```
apiVersion: v1
kind: Pod
metadata:
  name: mount
spec:
  containers:
    - name: container
      image: tmkube/init
      volumeMounts:
        - name: file-volume
          mountPath: /mount
  volumes:
    - name: file-volume
      configMap:
        name: cm-file
```